

Aerodynamics optimization of a rear-camera by CFD analysis and mesh morphing

Supervisor : Prof. Marco Evangelos Biancolini

Student : Lorenzo D'Anastasio

Co-supervisor : Eng. Ubaldo Cella, Eng. Gabriele Mirasoli

Index

The thesis was carried out as part of a collaboration between our university, ENGYS, Volvo and RBF.

- 1) Introduction
- 2) Targets
- 3) Preliminary analysis on the ASMO model
- 4) Study of the rear-camera of a new Volvo car
- 5) Results and comparisons
- 6) Conclusions


1. Introduction

Advanced Driver Assistance System or ADAS

- Automatic recognition and reading of road signs
- Automatic recognition of pedestrians
- Cameras for visual improvement

2010 Euro NCAP evaluation test for active safety technologies


- Regulation n.661/2009 CE
- Legislation n.78/2009 CE

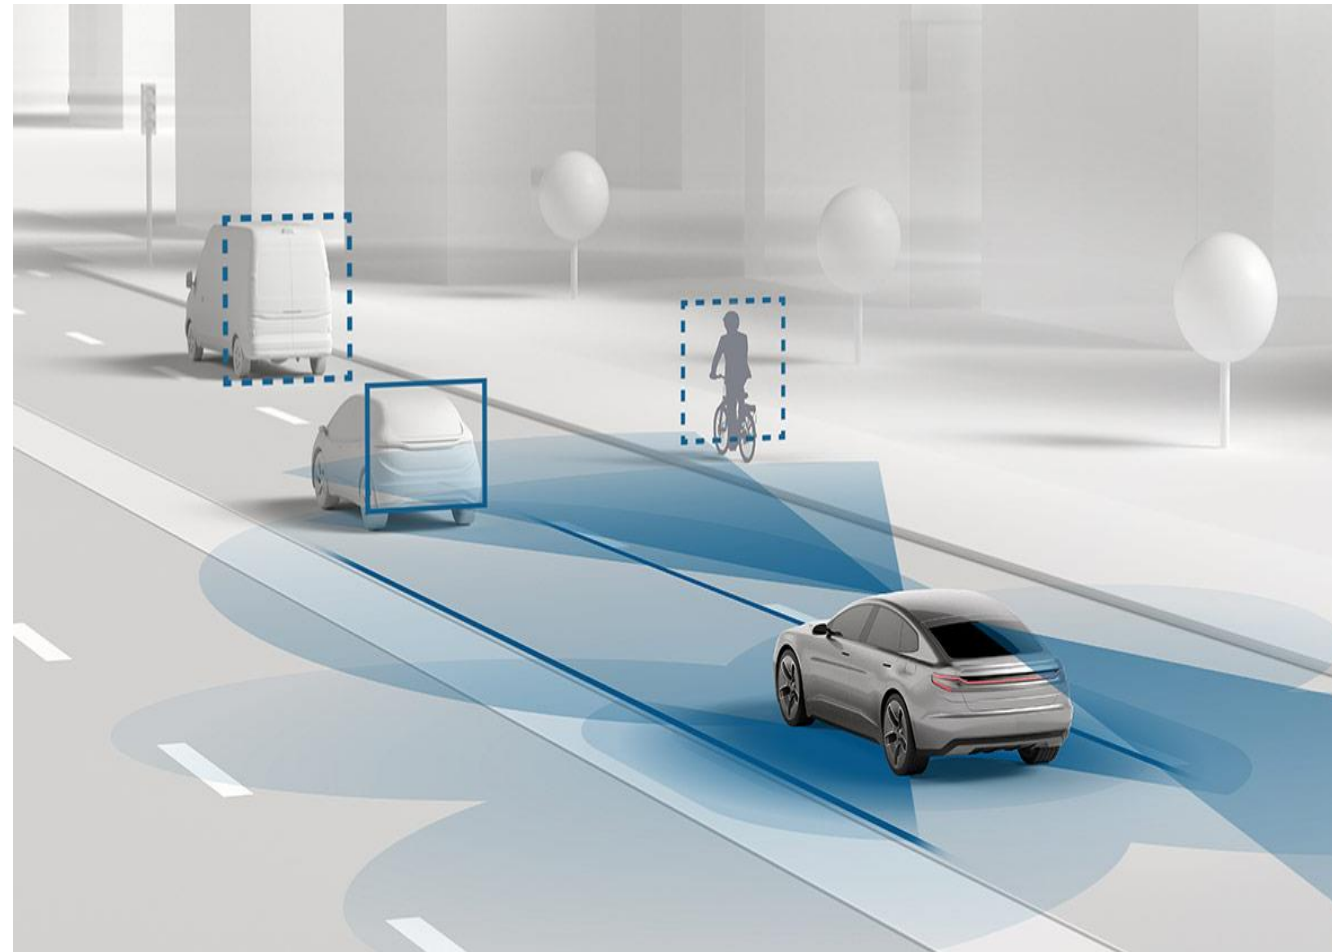

1. Introduction


EU Regulation 2019/2144 of the European Parliament and Council
Mandatory ADAS from July 2024:

- Reverse detection
- Automatic emergency braking system
- Maintenance systems and lane warning

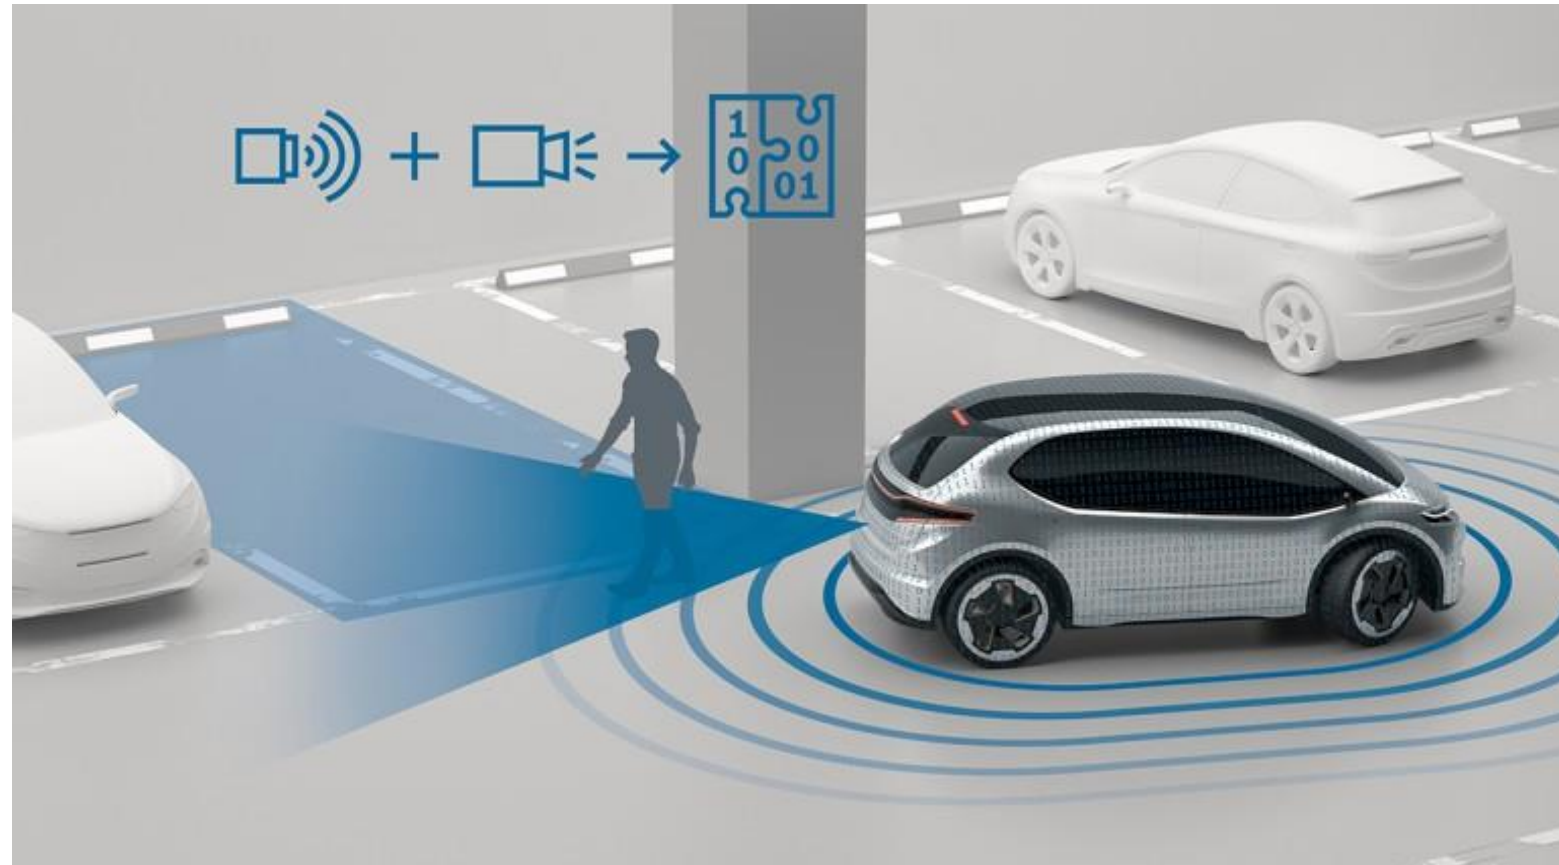

2. Targets

- Decrease in the accumulation of debris/dust on the section near the camera lens
- Reduction of the coefficient of aerodynamic resistance at the same cross-section of the lens

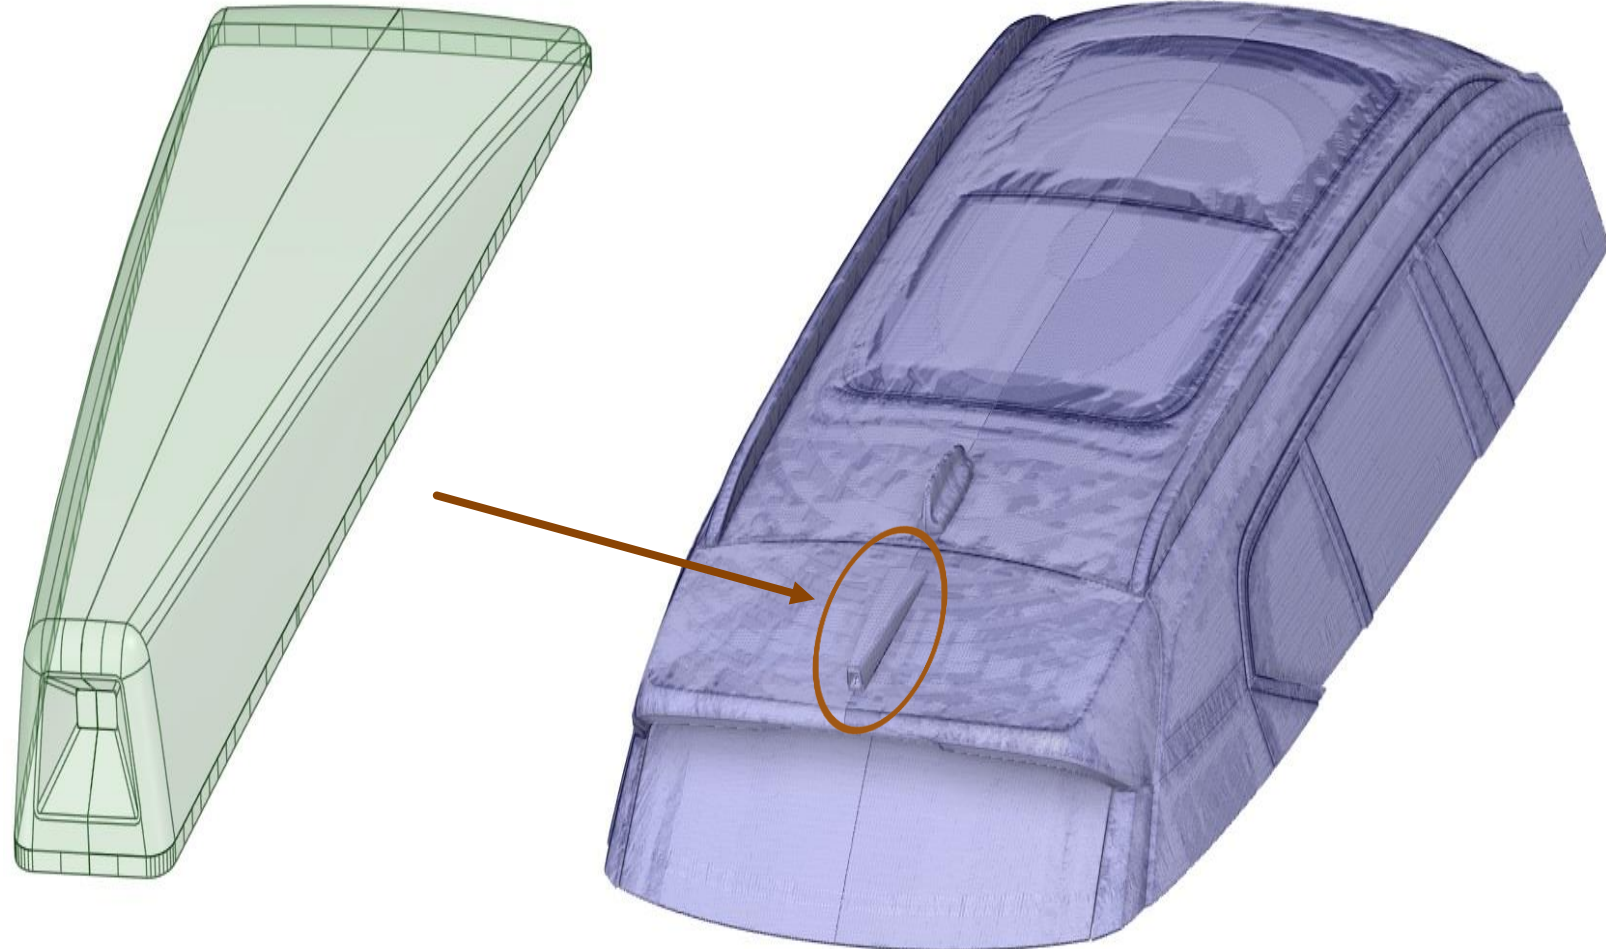


3. Preliminary analysis on the ASMO model

Article “ *Comparison of the ASMO Car Model with Experimental Data and Simulations* ”

Boundary conditions:


- Fixed ground
- Flow velocity 50 m/s
- Fluid air
- Temperature 20 °C
- Pressure 101 325 Pa

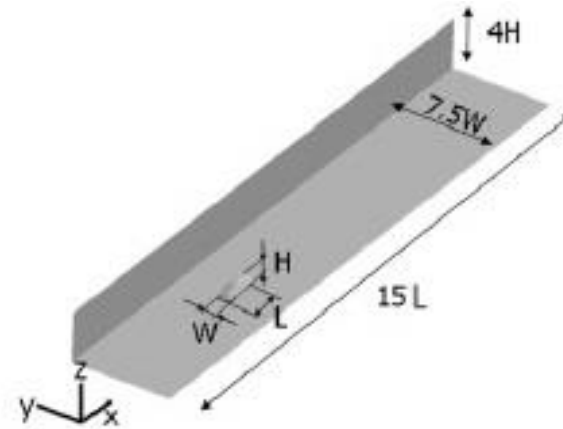

Asmo	Size [m]
L	0.82
W	0.29
H	0,28

Mesh :

- Rectangular cells with adaptive refinement
- 13.5 million total cells


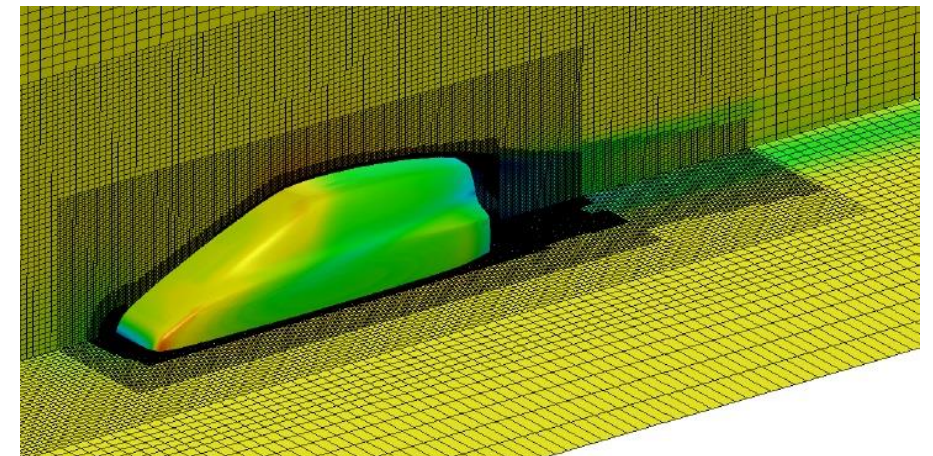


3. Preliminary analysis on the ASMO model

Article “ *Comparison of the ASMO Car Model with Experimental Data and Simulations*”

Proceedings	Time [h]
Case setup, pre-processing	1
Simulation	18
Analysis results and post-processing	4
Total	23 h

Type of analysis	Drag coefficient
Wind tunnel Volvo	0.158
Wind tunnel Daimler Benz	0.153
FloEFD Siemens	0.154
CFD 01 (k-ε method)	0.185
CFD 02	0.171
CFD 03	0.169
CFD 04	0.151

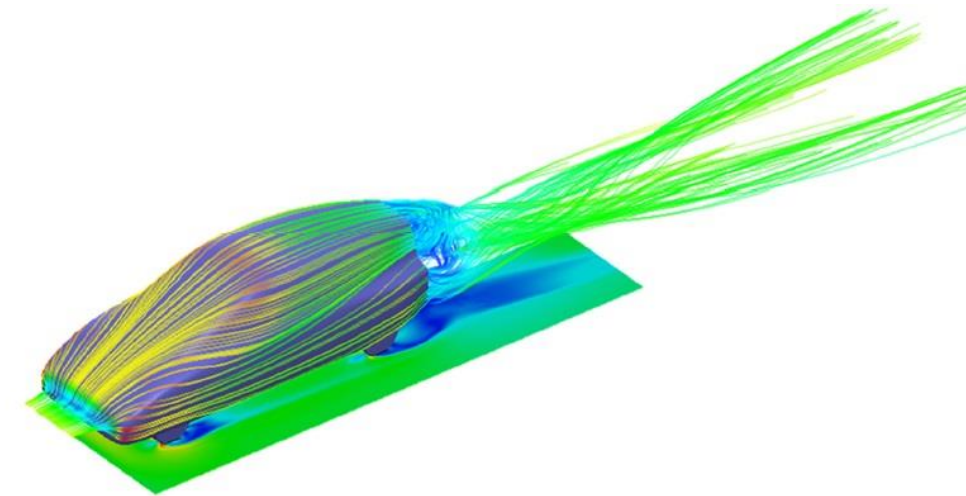

3. Preliminary analysis on the ASMO model

Software OpenFOAM

Workbooks:

- **0** → Initial & boundary conditions
- **constant** → Geometry, fluid properties and turbulence
- **system** → Wind tunnel, mesh, mode of integration, type of solver, results to be printed



Assignment of analysis by terminal



Post-processing on ParaView

Software HELIX



Work screen:

- **Mesh** → Base Mesh e Geometry
- **Setup** → Materials, Modelling, External Boundaries, Numerical Schemes, Solver Settings, Runtime Controls, Monitoring Functions e Fields Initialisation
- **Solver** → Runtime Controls, Residuals, Monitoring Functions
- **View** → Post-processing

3. Preliminary analysis on the ASMO model

Software OpenFOAM & HELYX:


- Mesh *SnappyHexMesh* and *helyxHexMesh* → 4 million cells
- # 3 Refinement Box in the rear of the ASMO → Cell sizes on the order of mm
- Boundary layer → 5 layers, final ratio 0.5, expansion ratio 1.2
- Turbulence → $k-\omega$ SST model

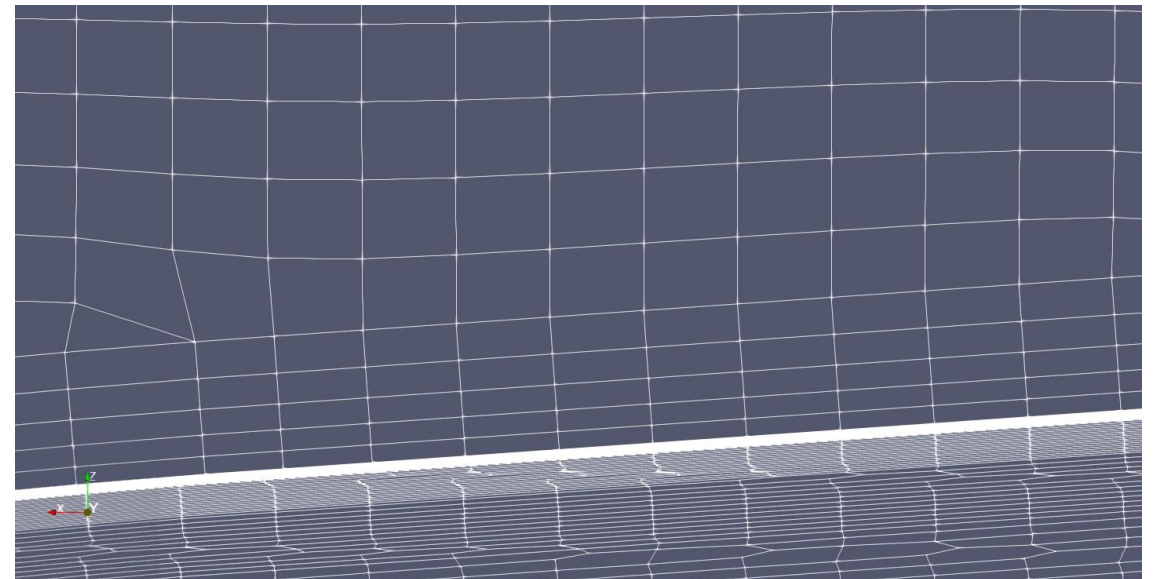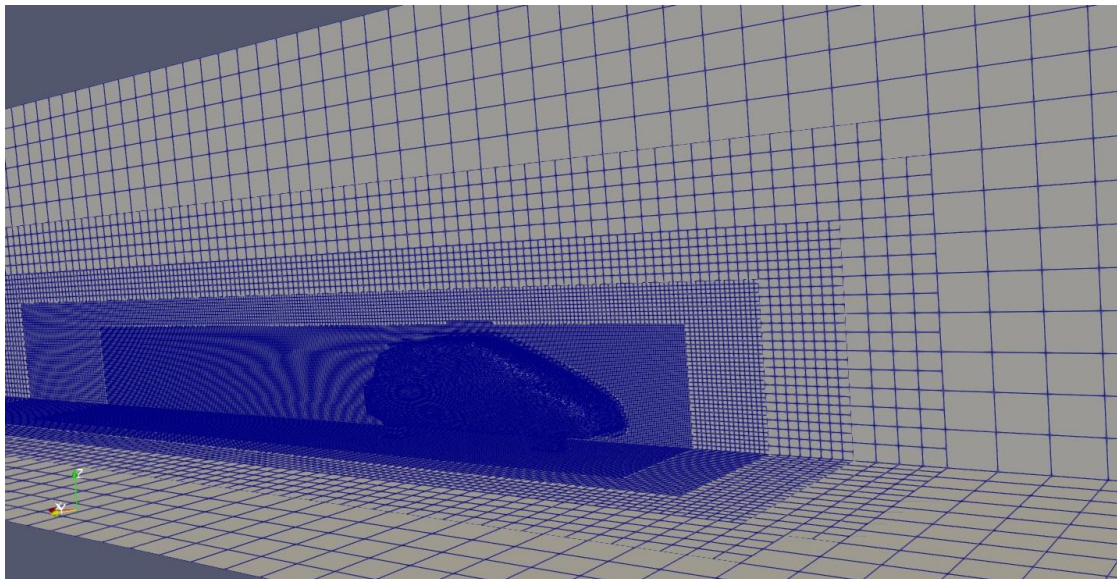

3. Preliminary analysis on the ASMO model

Morphing strategy for the ASMO:


- Scaling & Translation downward of rear roof edges
- Narrowing edges of the rear side

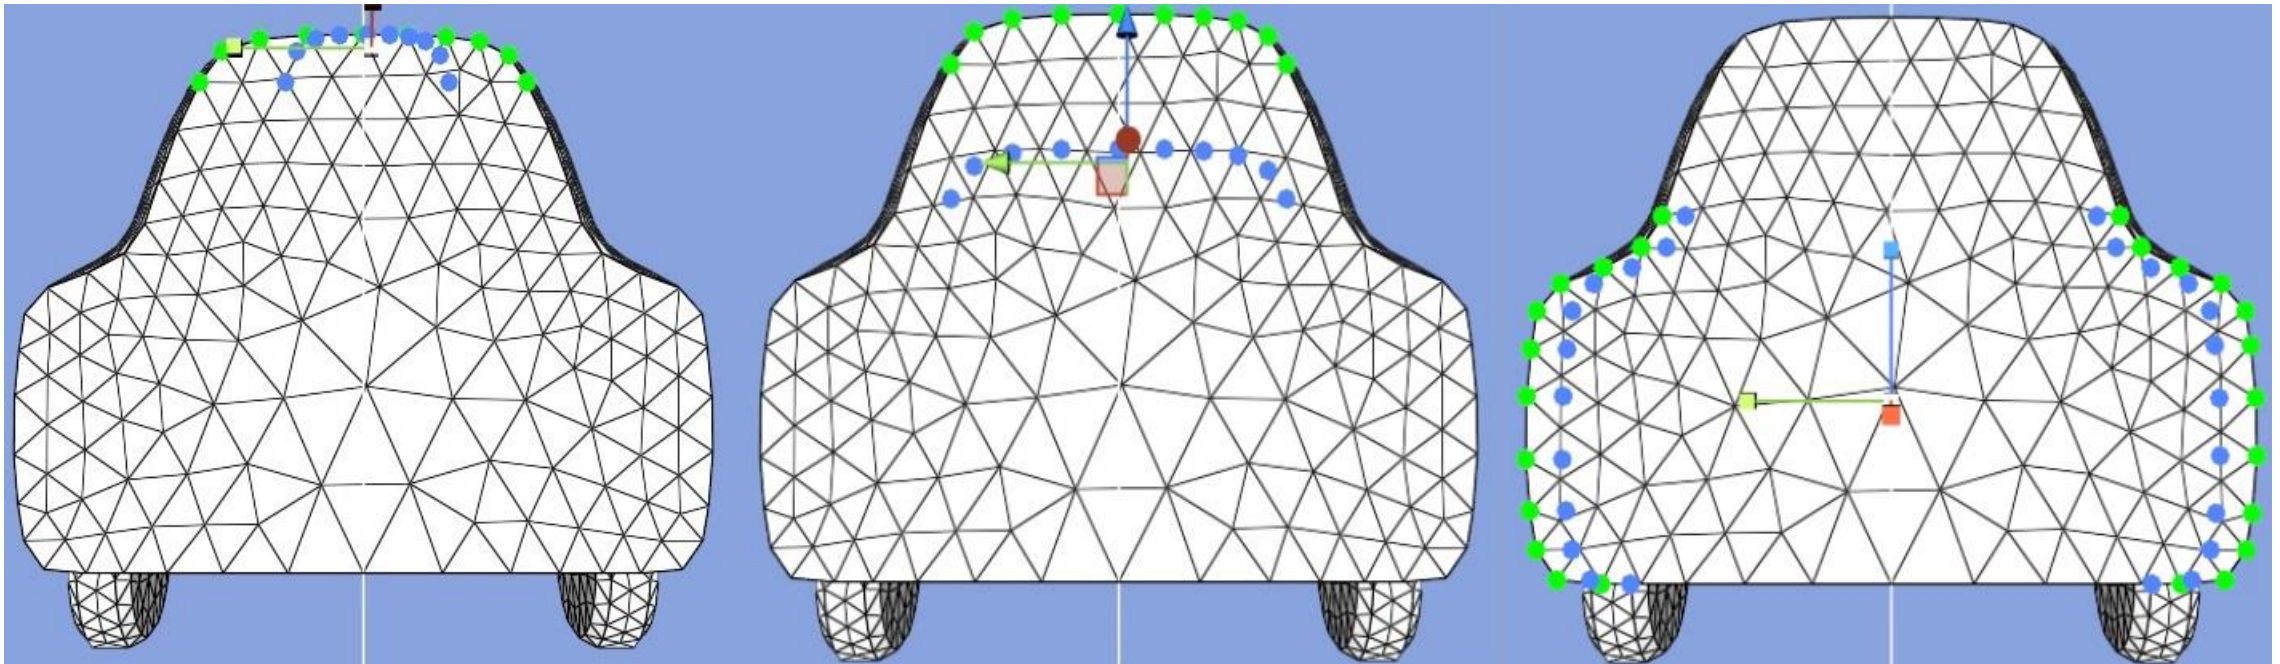



3. Preliminary analysis on the ASMO model

Results OpenFOAM & HELYX

Type of analysis	Drag coefficient
Asmo OpenFOAM standard	0.152
Asmo OpenFOAM surface morphing	0.144
Asmo OpenFOAM volume morphing	0.146
Asmo HELYX standard	0.162
Asmo HELYX surface morphing	0.153
Asmo HELYX volume morphing	0.153

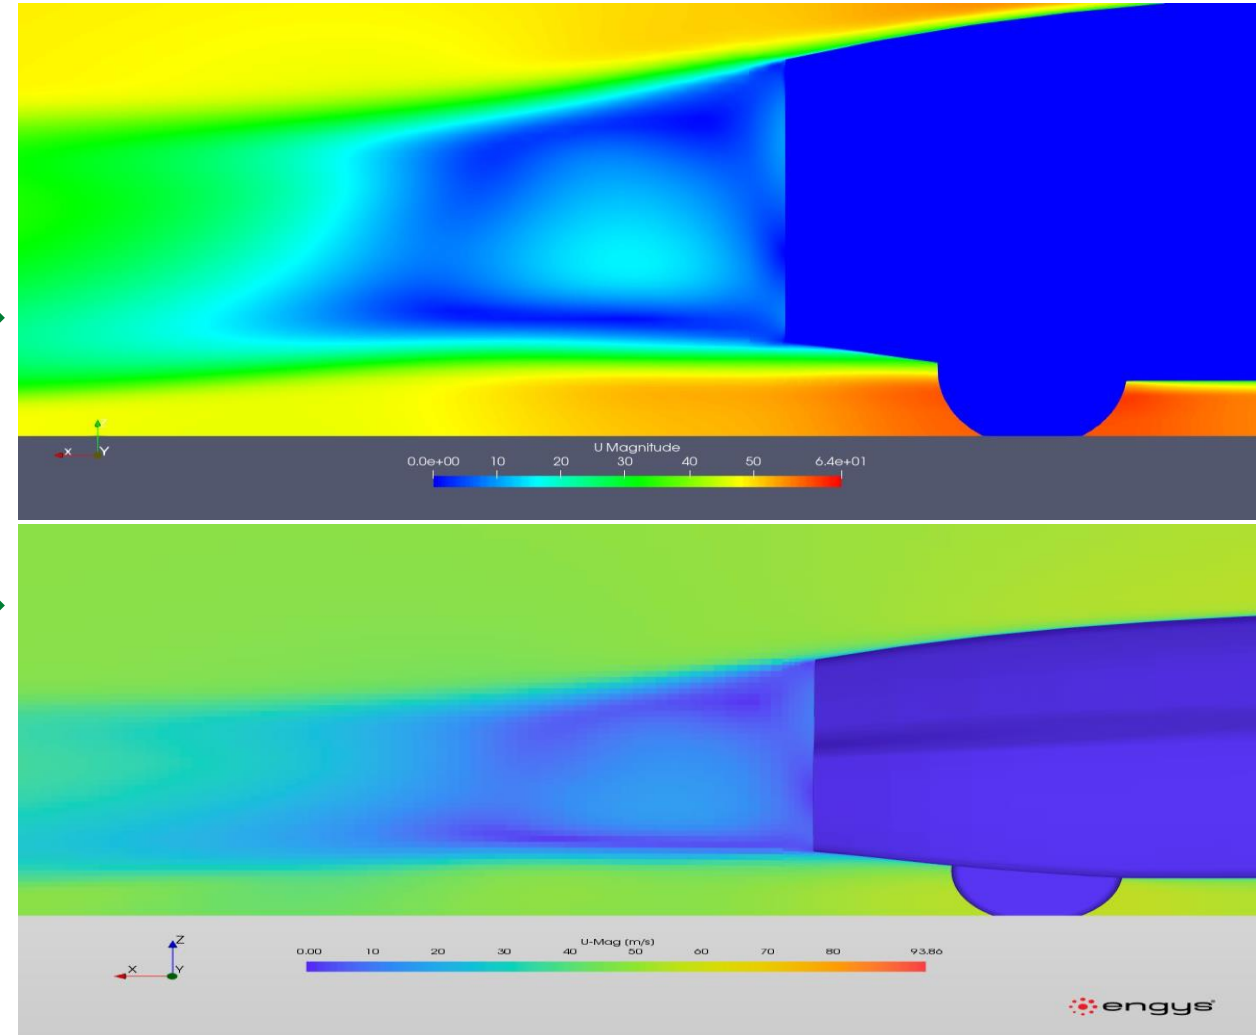



3. Preliminary analysis on the ASMO model

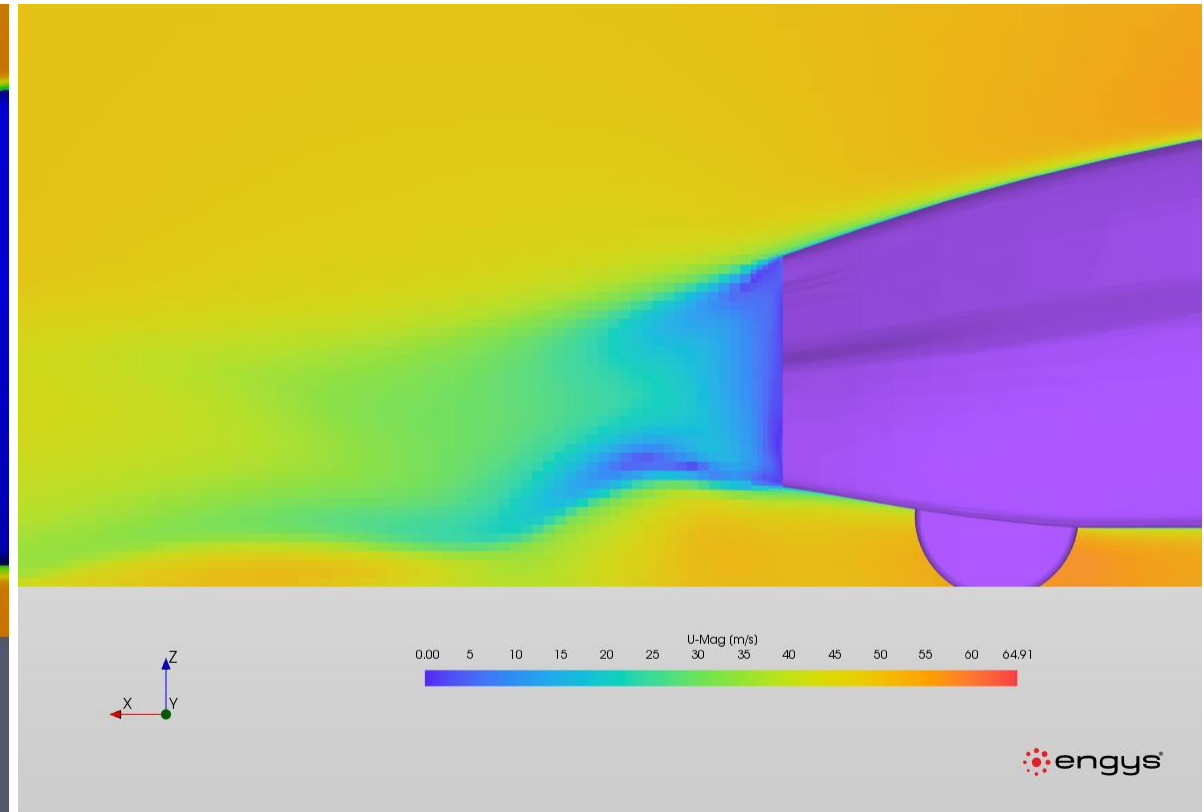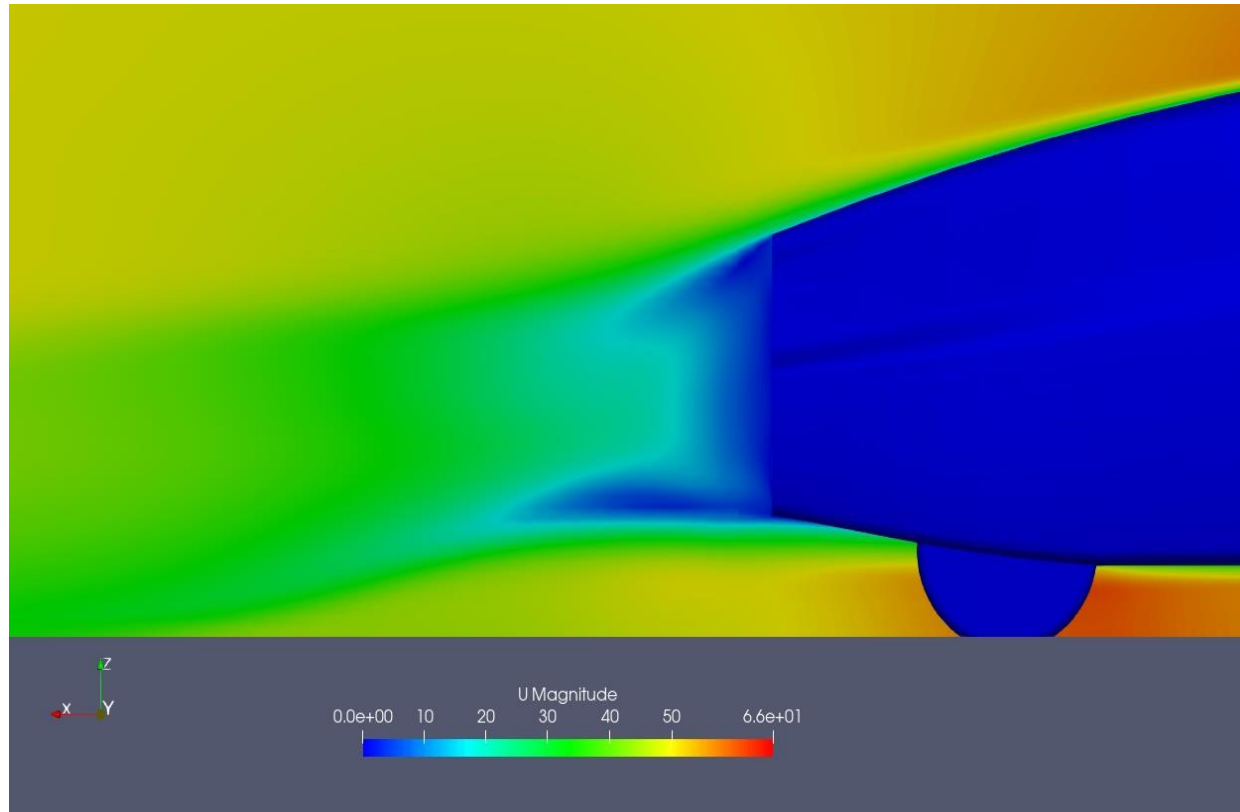

4. Study of the rear-camera of a new Volvo car




For reasons of secrecy the study is conducted with only the roof of the Volvo, because the car isn't yet on the market

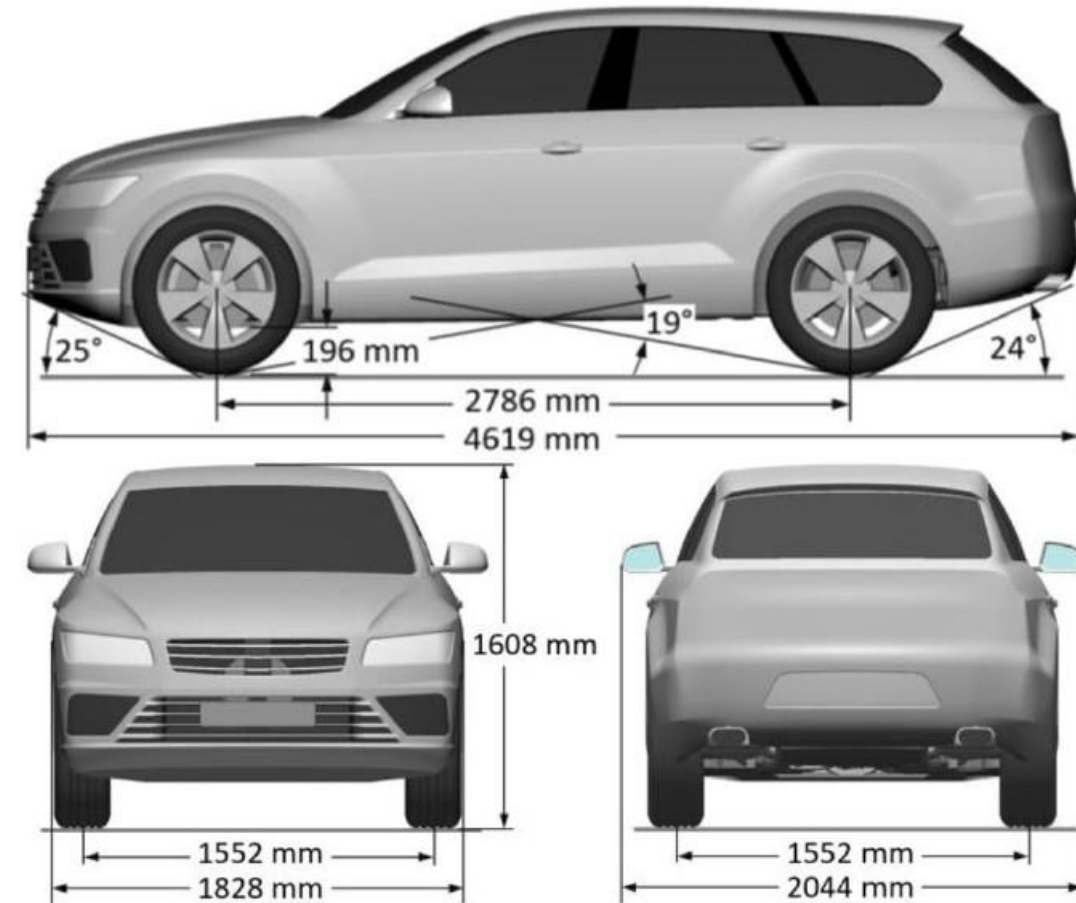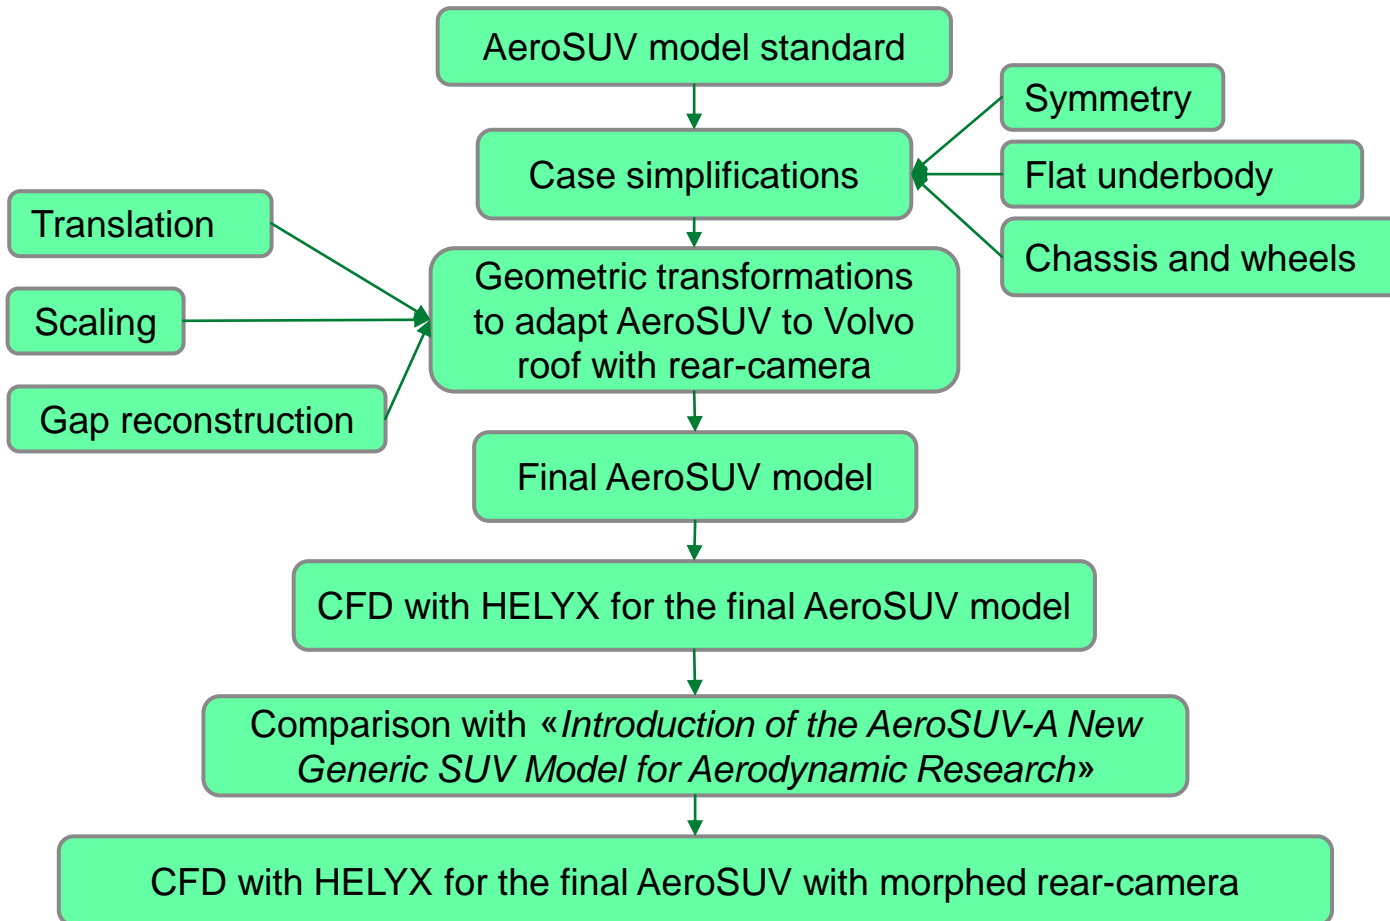


4. Study of the rear-camera of a new Volvo car

Geometric transformations with “fixed member” roof and “mobile” AeroSUV :

- I. Translation of the AeroSUV body
- II. Scaling of the AeroSUV body

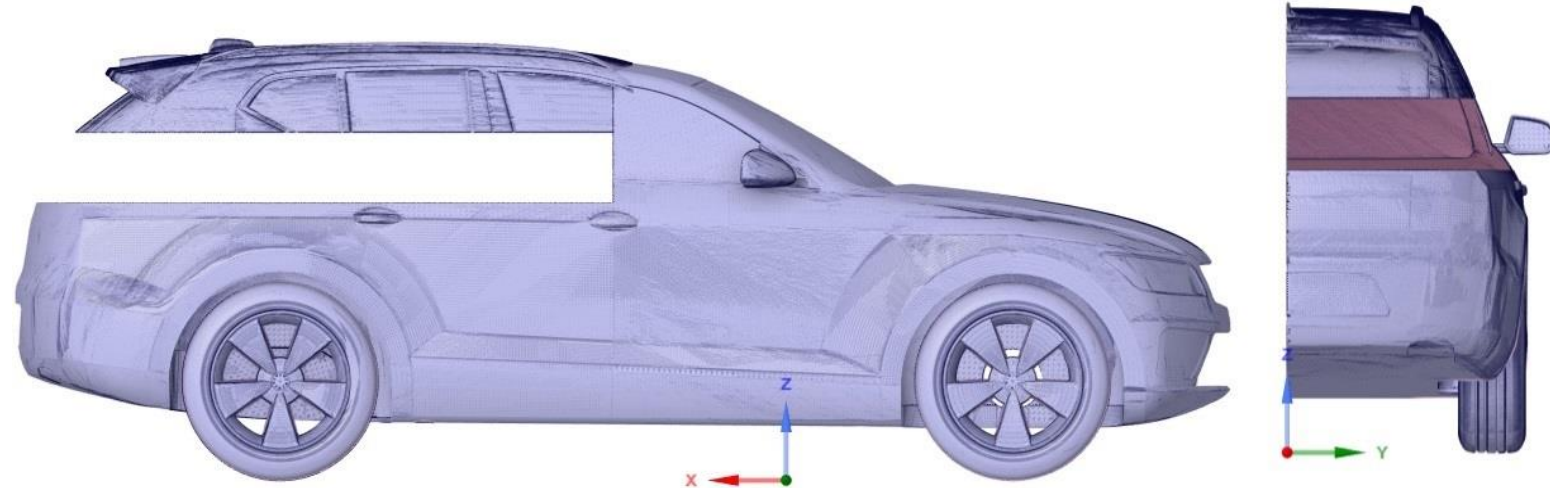

- III. Gap reconstruction by 3D sketch entities

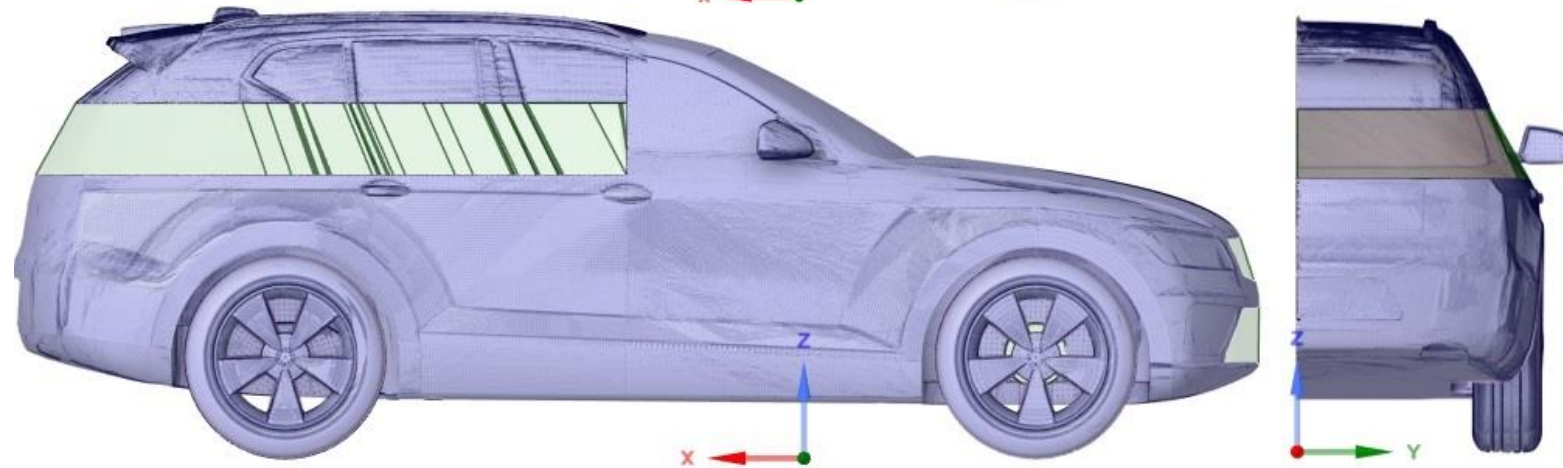


4. Study of the rear-camera of a new Volvo car

Article “Introduction of the AeroSUV-A New Generic SUV Model for Aerodynamic Research”

Wind tunnel boundary conditions :

- Type Station wagon, fastback and sedan in 1:4 scale
- Ground flow 50 m/s
- Velocity flow 50 m/s
- Fluid air


AeroSUV style	Drag coefficient
AeroSUV station wagon	0.314
AeroSUV fastback	0.286
AeroSUV sedan	0.286

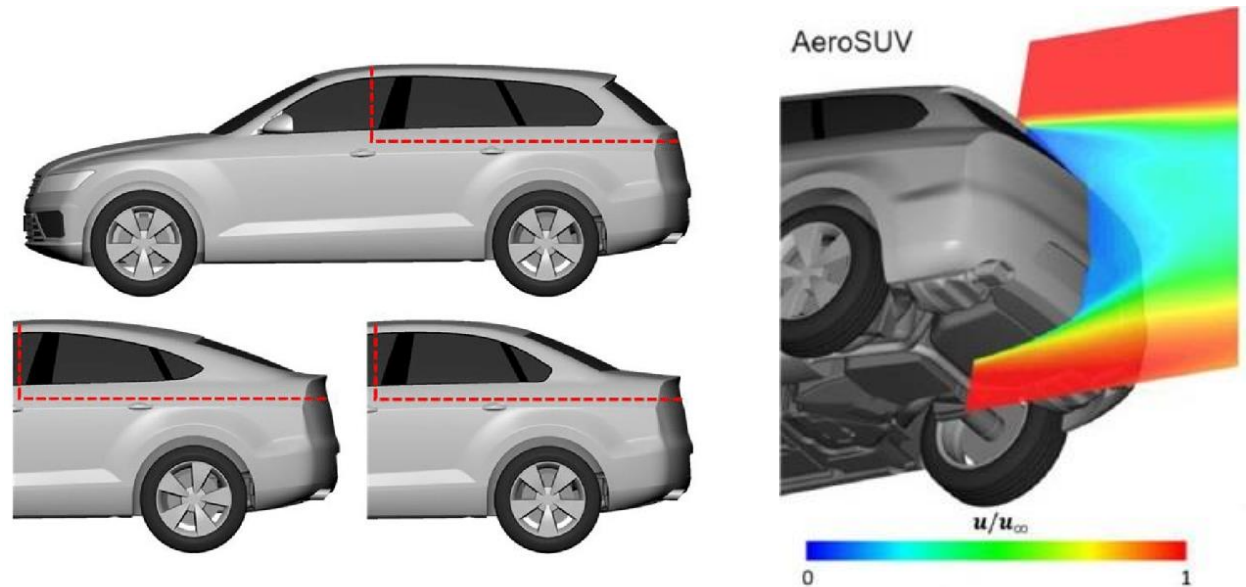

4. Study of the rear-camera of a new Volvo car


CFD software HELYX AeroSUV **Mesh:**

- Wind tunnel 25m along X, 3m along Y e 5m along Z
- # 3 ref.Box to AeroSUV &
- # 2 ref.Box to rear-camera
- ↳ Cells size of rear-camera on the order of mm

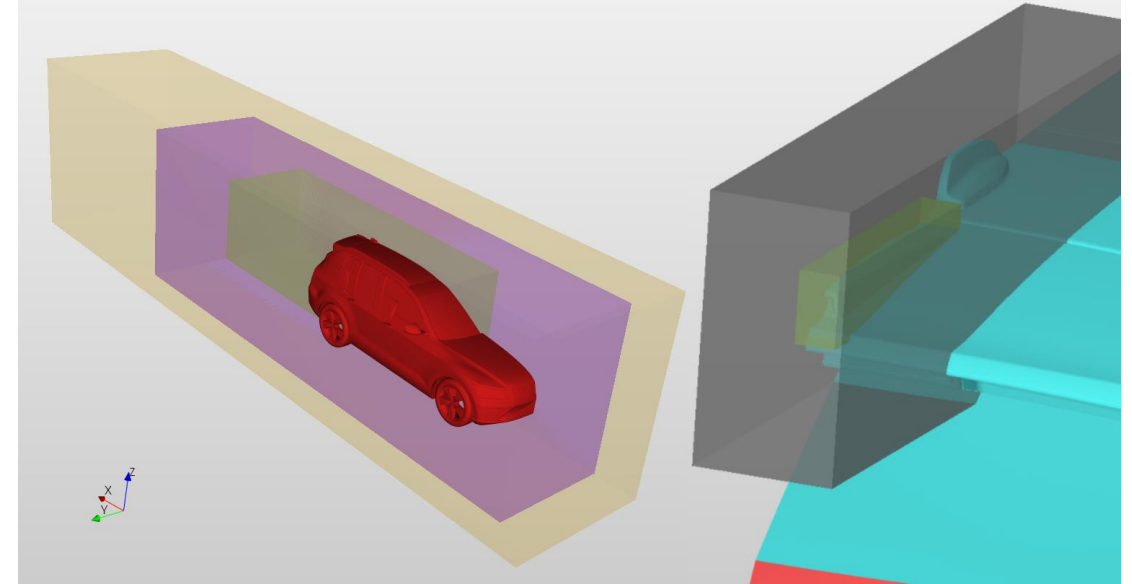

- AeroSUV, wheels level mesh 4 and roof level 5
- ↳ Cells size on the order of cm

Total grid of about 4.5 million cells

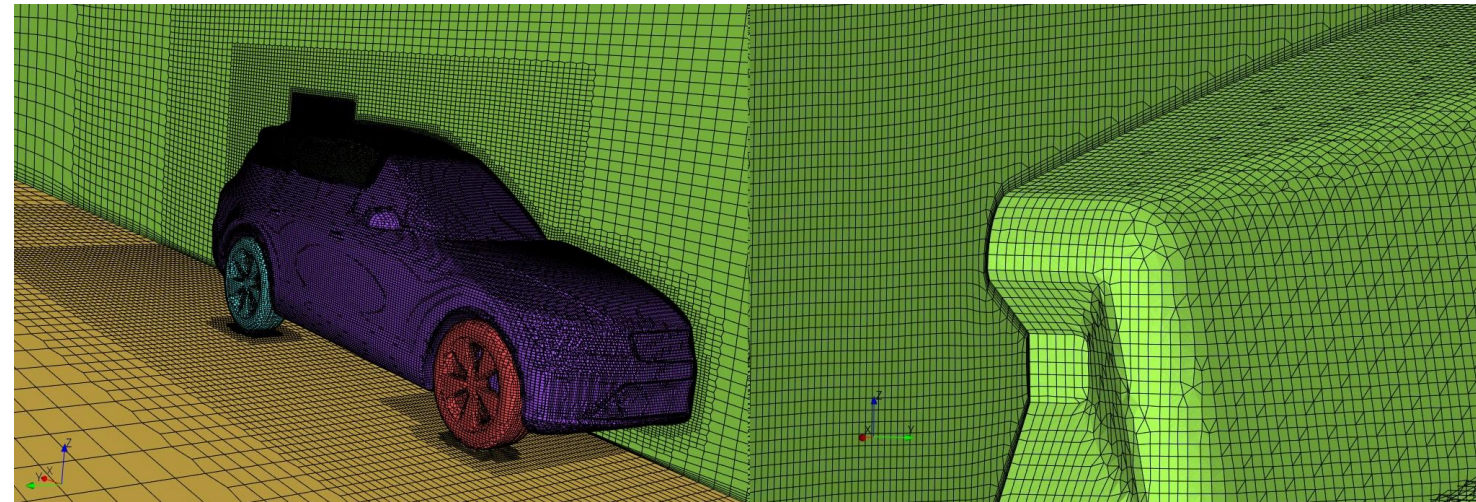

4. Study of the rear-camera of a new Volvo car

CFD software HELYX AeroSUV **Setup:**



- Tyre rolling by 2 *Reference Frames*
- Turbulence *RANS* method with *k- ω SST* model
- *External Boundaries* #6 tunnel surface, #4 of AeroSUV
- *Numerical Schemes* $\rightarrow U, p, k, \omega$ with Gauss linearization
- *Solver Settings* \rightarrow *Residual Control* U, p, k, ω 0.00001
- *Runtime Controls* \rightarrow 1000 s with time-step 1 s
- *Field Initialisation* $\rightarrow k = \frac{3}{2} (|V|I)^2$; $\omega = \frac{k^{0.5}}{C_{\mu}^{0.25} l_m}$

- Chassis, roof and wheels *Wall, No-slip*
- front *Symmetry Plane*
- inlet *Velocity* profilo costante 50 m/s in X
- outlet *Fixed Pressure* 0 Pa
- lowerWall *Moving Wall* 50 m/s in X
- upperWall *Wall, Slip*

4. Study of the rear-camera of a new Volvo car

Morphing strategy for the rear-camera:

- Reconstruction of the rear-camera surface and its simplifications
- Translation & Rotation of side surfaces with 4x4 distribution of the two parameters

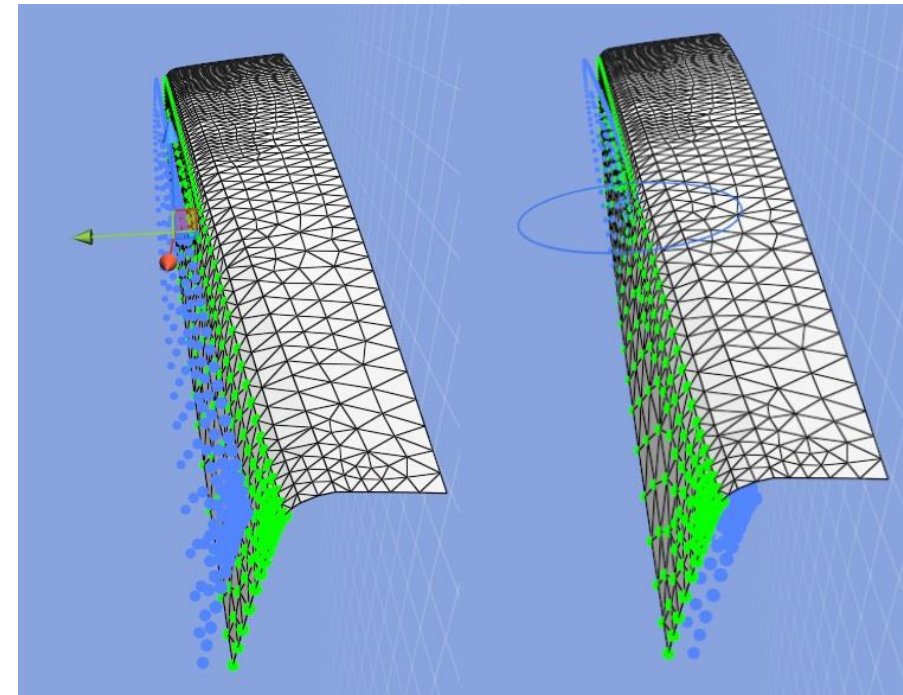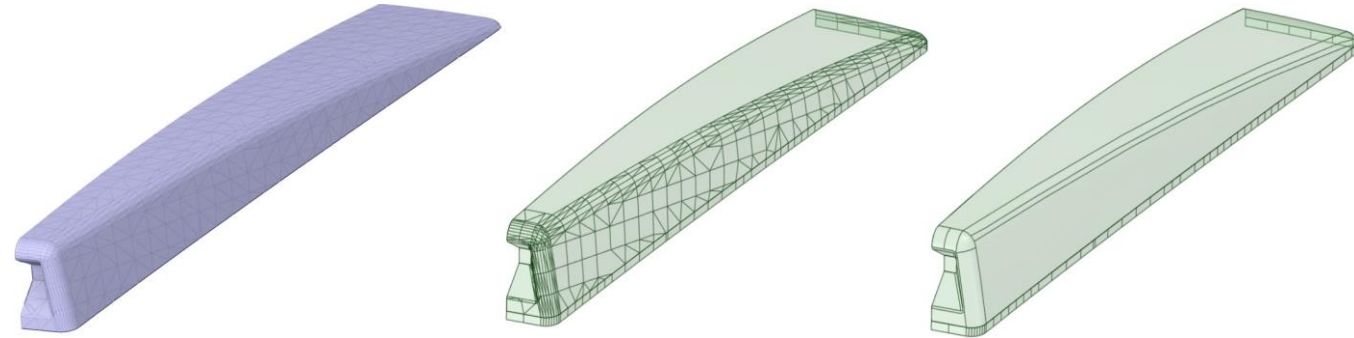


Configurations	Rotation around Z [°]			
Translation along Y [mm]	0.5;1	0.5;1.5	0.5;2	0.5;2.5
	1;1	1;1.5	1;2	1;2.5
	1.5;1	1.5;1.5	1.5;2	1.5;2.5
	2;1	2;1.5	2;2	2;2.5

5. Results and comparisons



HELIX results of AeroSUV with Volvo roof

AeroSUV style	Drag coefficient
AeroSUV station wagon	0.314
AeroSUV fastback	0.286
AeroSUV sedan	0.286
AeroSUV and Volvo roof	0.2856 ✓

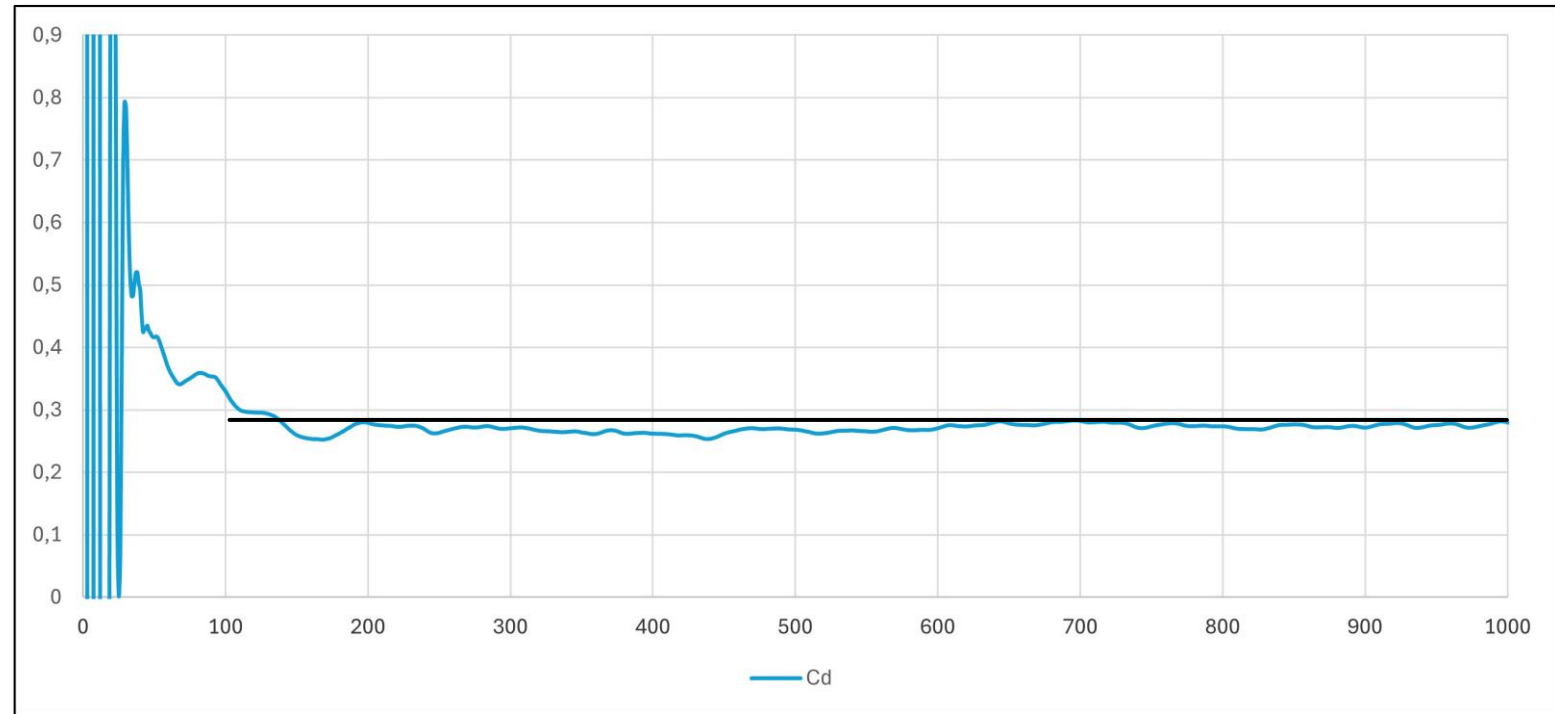

Initial fluctuations due to the phenomenon and the RANS, for the calculation of the Cd we neglect the initial values

5. Results and comparisons

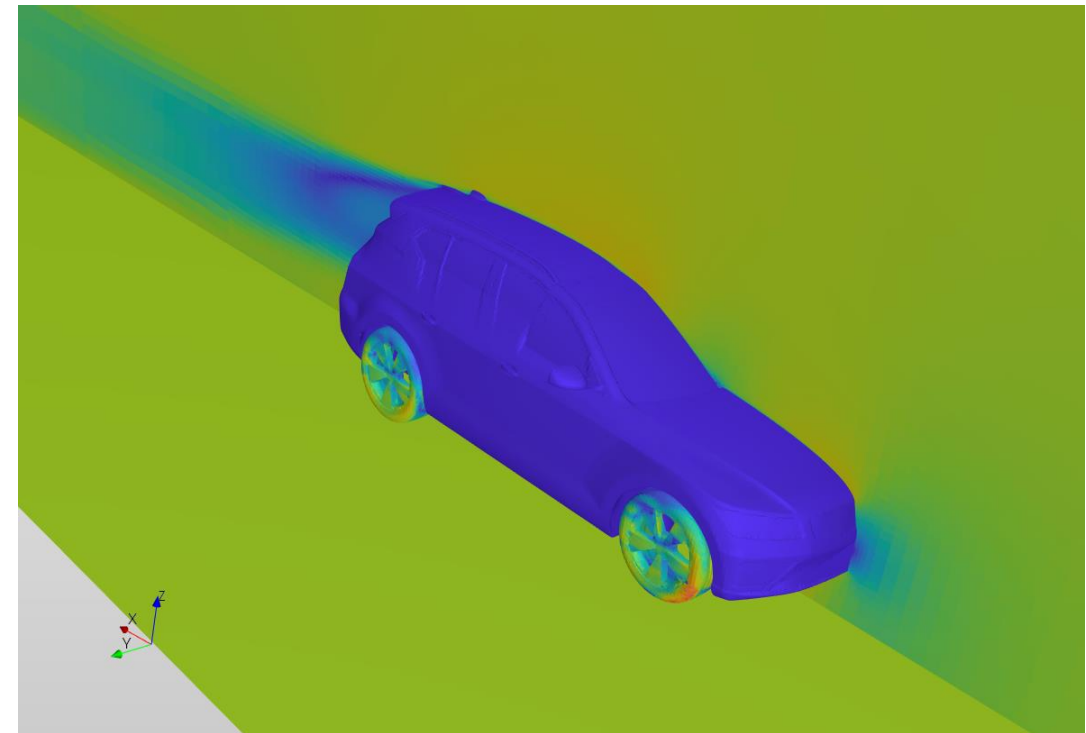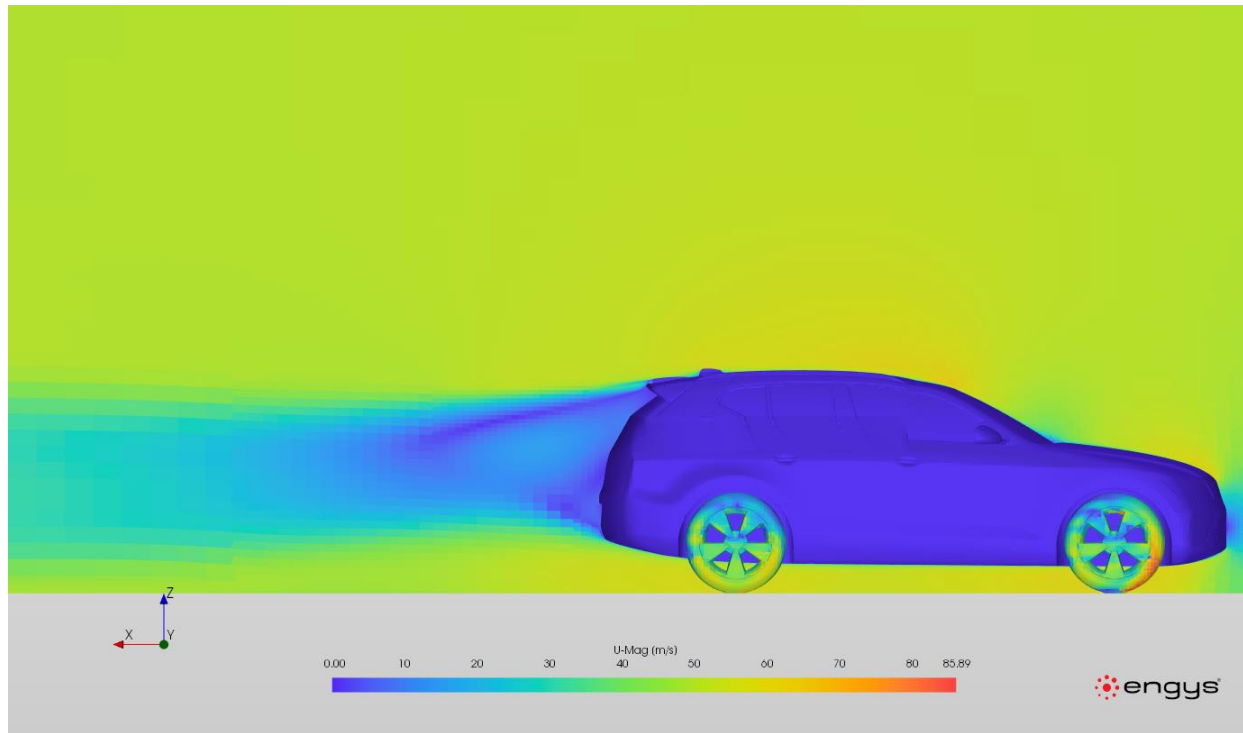

5. Results and comparisons

HELYX results of AeroSUV with Volvo roof and morphing of the rear-camera

Rear-camera configurations	Drag force [N]	Cd	Rear-camera configurations	Drag force [N]	Cd
✓ Geometry standard	0.4001	0.000253	Geometry standard	0.4001	0.000253
✓ Trasl. Y 0.5mm & Rot. Z 1°	0.3739	0.000246	Trasl. Y 1.5mm & Rot. Z 1°	0.4121	0.000274
✓ Trasl. Y 0.5mm & Rot. Z 1.5°	0.3741	0.000253	Trasl. Y 1.5mm & Rot. Z 1.5°	0.4107	0.000273
Trasl. Y 0.5mm & Rot. Z 2°	0.374	0.000251	Trasl. Y 1.5mm & Rot. Z 2°	0.4352	0.000286
Trasl. Y 0.5mm & Rot. Z 2.5°	0.405	0.00027	Trasl. Y 1.5mm & Rot. Z 2.5°	0.4154	0.000273
Trasl. Y 1 mm & Rot. Z 1°	0.3931	0.000261	Trasl. Y 2mm & Rot. Z 1°	0.4194	0.000275
Trasl. Y 1 mm & Rot. Z 1.5°	0.3814	0.000252	Trasl. Y 2mm & Rot. Z 1.5°	0.4011	0.000264
Trasl. Y 1 mm & Rot. Z 2°	0.4011	0.000265	Trasl. Y 2mm & Rot. Z 2°	0.4192	0.000275
Trasl. Y 1 mm & Rot. Z 2.5°	0.4154	0.000273	Trasl. Y 2mm & Rot. Z 2.5°	0.4204	0.000276

5. Results and comparisons



Comparisons between the three best morphing configurations and standard geometry

Rear-camera configurations	Forza di drag [N]	Cd	ΔF_d [N]	$\Delta C_d \cdot 10^{-6}$	Percent improvement drag
Geometria standard	0.4001	0.000253			
✓ Trasl. Y 0.5mm & Rot. Z 1°	0.3739	0.000246	-0.0262	-7	-7 %
✓ Trasl. Y 0.5mm & Rot. Z 1.5°	0.3741	0.000253	-0.026	0	-6.5 %
✓ Trasl. Y 0.5mm & Rot. Z 2°	0.374	0.000251	-0.0261	-2	-6.5 %

The shape optimization has therefore produced #3 possible configurations that meet the goals set before work.



5. Results and comparisons

HELYX results of AeroSUV with Volvo roof and morphing of the rear-camera **best case**

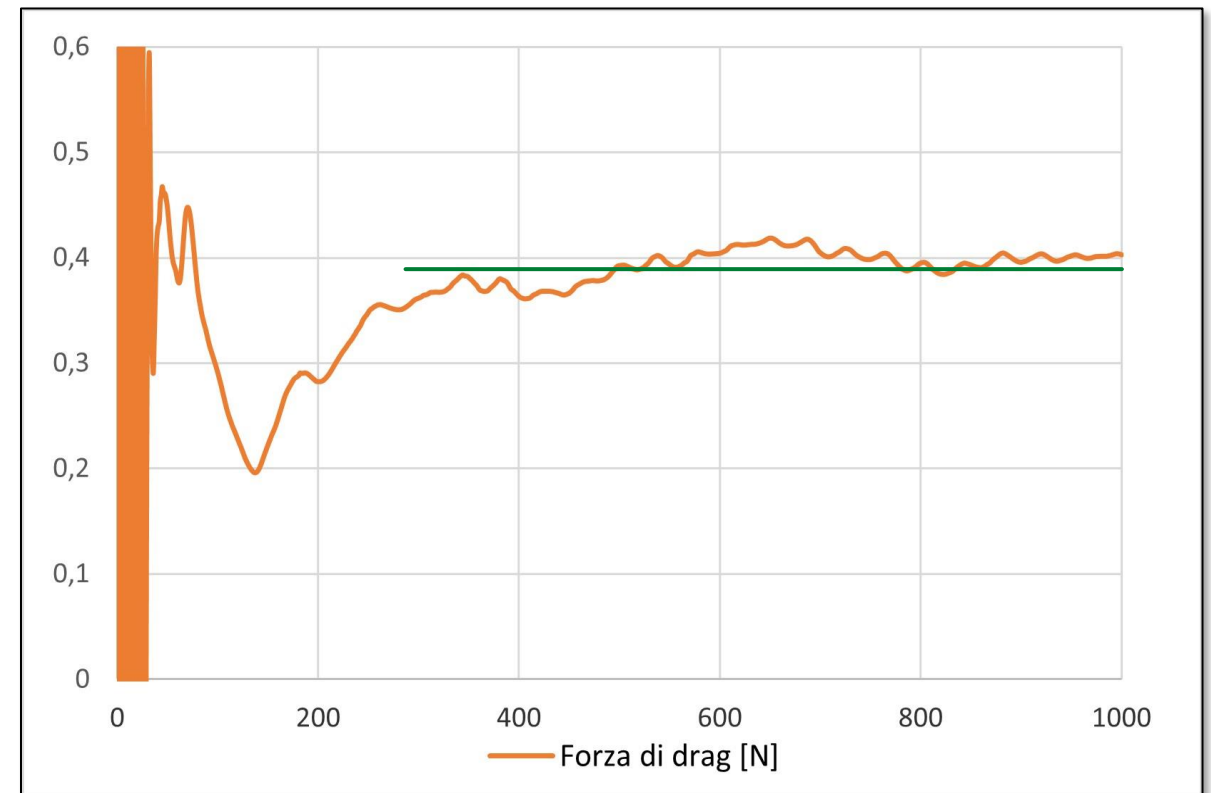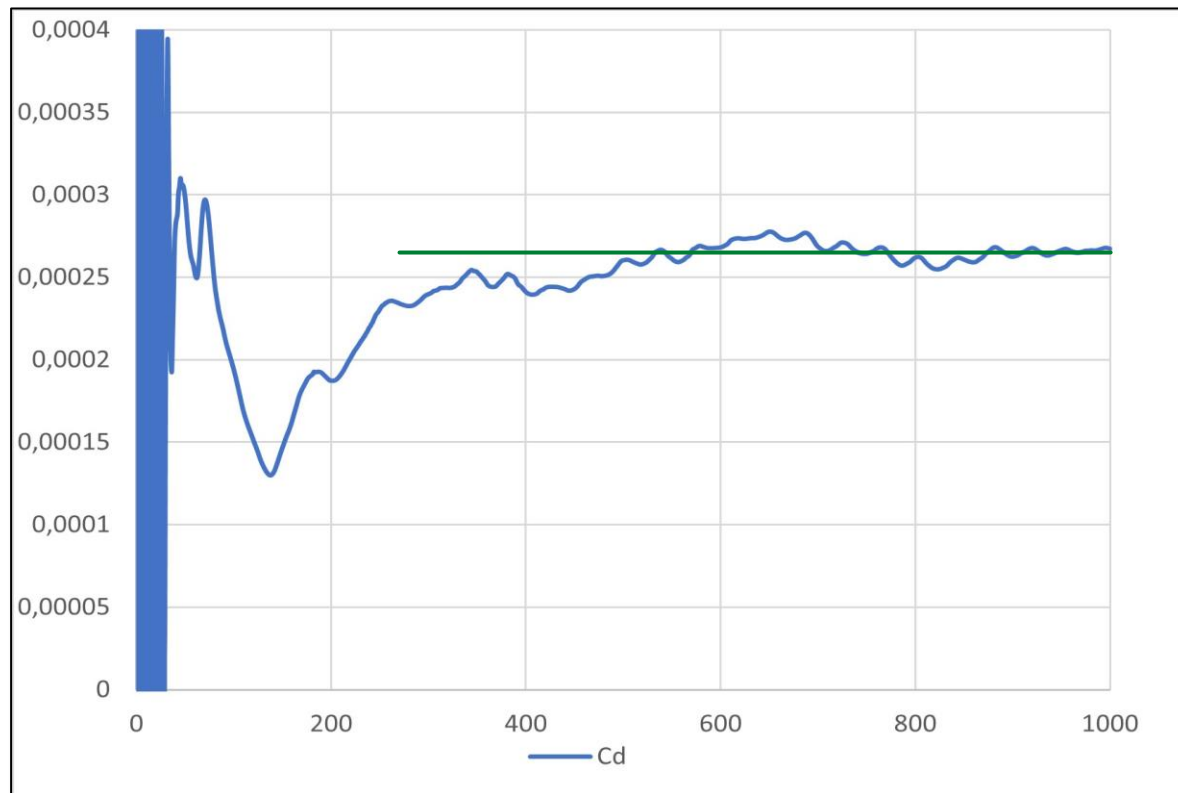

5. Results and comparisons

HELYX results of AeroSUV with Volvo roof and morphing of the rear-camera **best case**

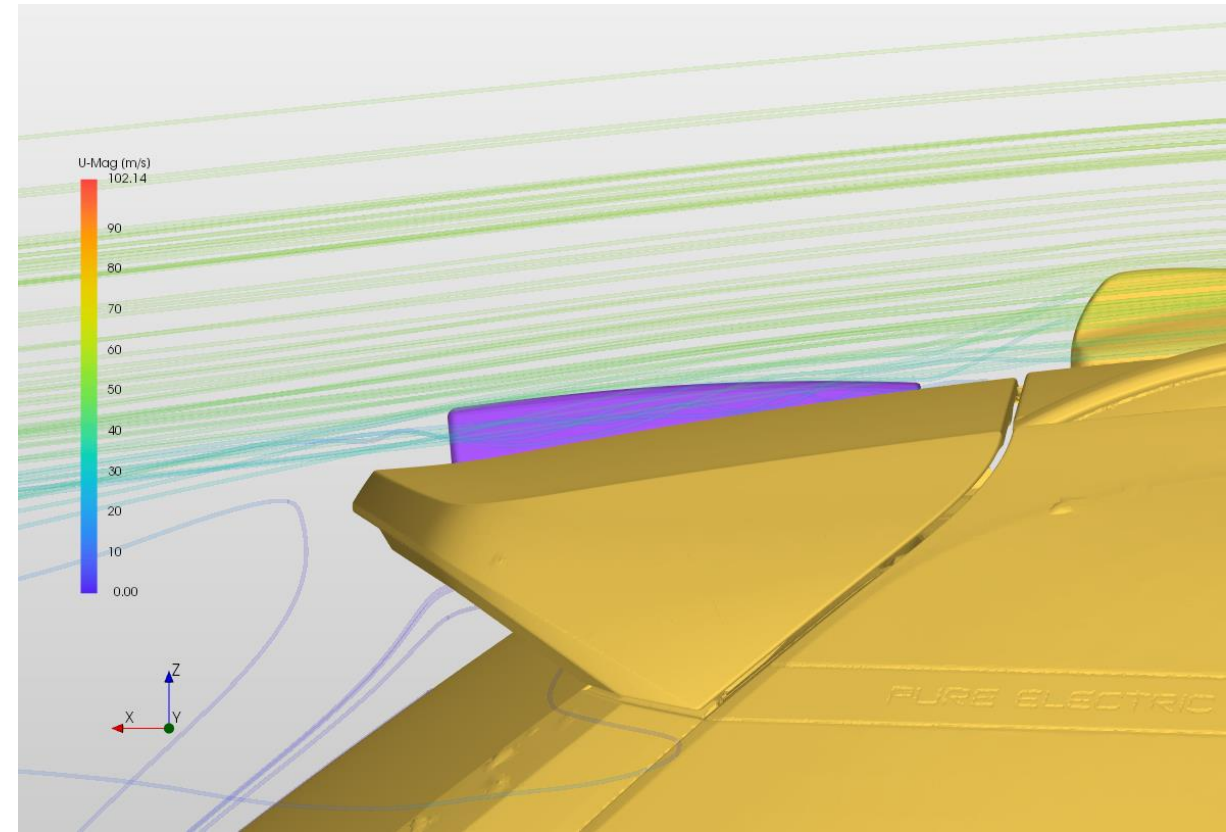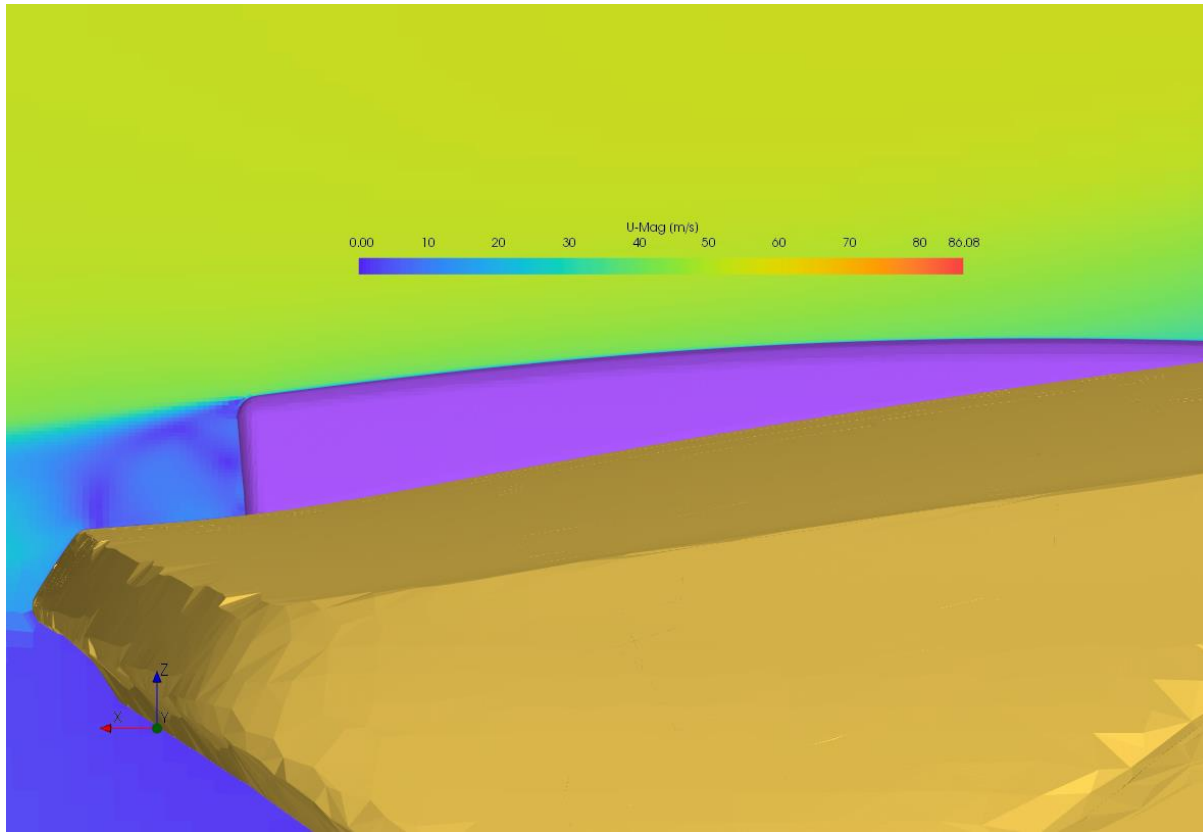

6. Conclusions

The **contributions** of the work carried out can be summarized as follows:

- Use of models for "light" CFDs, through rigorous choices and simplifications that have significantly reduced the computational burden (symmetry, targeted refinementBox, geometric simplifications), while maintaining a high rate of fidelity to the problem.
- Calibration and derivation of methods for industrial cases, validated by comparison with studies with compute centers and wind tunnels.
- Drastically decrease geometric parameterization time by a meshmorphing-based approach, rather than laborious and heavy re-meshing.
- Use of the generic and highly specialized AeroSUV geometry, valid for many SUV vehicles that are special to the industrial case through its adaptation to the Volvo roof with rear-camera.

Aerodynamics optimization of a rear-camera by CFD analysis and mesh morphing

Supervisor : Prof. Marco Evangelos Biancolini

Student : Lorenzo D'Anastasio

Co-supervisor : Eng. Ubaldo Cella, Eng. Gabriele Mirasoli



TOR VERGATA
UNIVERSITÀ DEGLI STUDI DI ROMA